



MURPHY®

by **ENOVATION** CONTROLS

LARGE, FULL-COLOR DISPLAY BRINGS POWER, CONNECTIVITY TO RUGGED APPLICATIONS

POWERSVIEW® 1200

Pending Q3 Release



Largest display in the PowerView line at 12.3-in.

Boasts high-speed processor and wide format display

Easy-to-use configuration software

CAN-based display with rich, full-color graphics

Compatible with mechanical and electronic engines

Bonded glare-free LCD screen



The PowerView 1200 offers all the features of Murphy's popular PV780 with more power, more memory and more real estate to show vital application information on one screen. With its faster processor, this version of the full-color display adds more connectivity with Bluetooth, Ethernet and Wi-Fi capabilities while it includes an expansive 8GB of storage.

The full-featured, configurable display integrates vital engine, transmission and diagnostic information into an easy-to-read operator interface.


The 12.3-inch screen, with glove touch, can be easily viewed, even in full sunlight. The display's bonded LCD and rugged design make it a perfect solution for all types of environments and applications.

Customization of the display can be accomplished quickly via graphical programming or scripting with the PowerVision Configuration Studio® software. This tool allows for quick creation of personalized user interfaces, custom parameters and specialized graphics for on-screen text, OEM branding and more.


POWerview® 1200

DIMENSIONS


Front

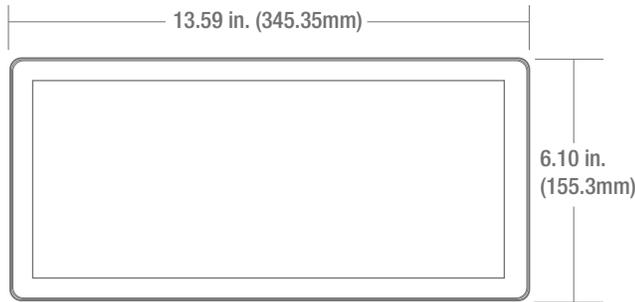

Side

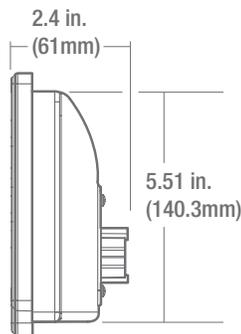

Back

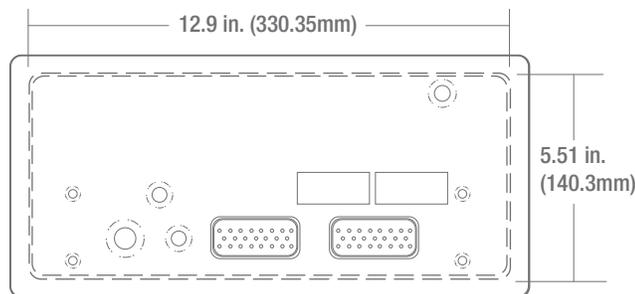

SPECIFICATIONS

COMPUTING:

- Main Processor: Renesas R-Car M2, 32 Bit Arm Cortex A15 Processor @ 1.5 GHz
- Operating System: QNX® Realtime Operating System
- Storage: 8 GB Flash memory
- RAM: 512 MB DDR3-SDRAM
- Graphics: PowerVR SGX544MP2 (3D) (Option)
Renesas graphics processor (2D)

HARDWARE:

- Display: Type 12.3" (320 mm (H) x 130 mm (V))
LVDS IPS LCD with LED backlight
- Color: 24-Bit color
- Resolution: 1280 x 480
- Contrast Ratio: Typ. 800:1
- Brightness: 1000 cd/m²
- Surface: Anti-glare, hard-coating, touch panel
- Real Time Clock: Available with Li-Ion battery backup
- Connectors: (2) Ampseal 23 pin (Main)
(1) M12, 5-pin (Ethernet)
(1) USB pigtail
- Video input: (3) NTSC/PAL

COMMUNICATION:

- CAN: (2) CAN 2.0B according to ISO-11898-2;
J1939 and CANopen; proprietary messaging
- Serial: (1) RS-485 serial (Modbus: Master/Slave)
- USB: (2) USB 2.0 Full Speed Host
- Ethernet: (1) Ethernet 10/100 Base-T
- WiFi: 802.11 b/g radio
- Bluetooth: Fully Integrated Bluetooth 2.1, Class 1

ELECTRICAL:

- Operating Voltage: 6 – 36 VDC, Reverse polarity protected
- Outputs: (1) 500mA Switched Low-side
(1) Frequency Output (2Hz – 3KHz)
- Inputs: (3) Analog 0 – 5 VDC, 4-20mA, Resistive, 10-bit resolution
(5) Discrete digital, active-high
(1) Frequency In (2Hz–10kHz) 5Vpk-pk min,
120Vpk-pk max
(1) Frequency In (2Hz - 10kHz) 5Vpk-pk min, 120Vpk-pk max

ENVIRONMENTAL:

- Operating and Storage Temperature: -40C to +85C [-40F to +185F)
- Protection: IP66 and IP67, front and back, for outdoor use
- Vibration: 7.86 Grms (5 – 2000Hz), 3 axes
- Shock: ±50G in 3 axes
- EMC/EMI: SAEJ1113, ISO13766, E-mark (ECE R10.5), EN13309, EN 14982, CE per 2014/30/EU, FCC part 15

ENOVATION CONTROLS CORPORATE HEADQUARTERS
5311 S 122ND EAST AVENUE
TULSA, OK 74146

ENOVATION CONTROLS LTD. – UNITED KINGDOM
CHURCH ROAD LAVERSTOCK
SALISBURY SP1 1QZ UK

MURPHY INTERNATIONAL TRADING – CHINA
SUITE 1704, ANTAI BUILDING, 107 ZUNYI RD
SHANGHAI, 2000 S1 CHINA

ENOVATION CONTROLS INDIA PVT. LTD.
301, 3RD FLOOR, KRSNA CHAMBERS,
11 GALAXY GARDENS, NORTH MAIN ROAD,
KOREGAON PARK, PUNE 411001,
MAHARASHTRA, INDIA

U.S. SALES & SUPPORT

MURPHY PRODUCTS
PHONE: 918 317 4100
EMAIL: SALES@ENOVATIONCONTROLS.COM
WWW.ENOVATIONCONTROLS.COM

MURPHY INDUSTRIAL PANEL DIVISION
PHONE: 918 317 4100
EMAIL: IPDSALES@ENOVATIONCONTROLS.COM

INTERNATIONAL SALES & SUPPORT

EUROPE, MIDDLE EAST, AFRICA
PHONE: +44 1722 410055
EMAIL: SALES@ENOVATIONCONTROLS.EU

CHINA
PHONE: +86 21 6237 5885
EMAIL: APSALES@ENOVATIONCONTROLS.COM

LATIN AMERICA & CARIBBEAN
PHONE: +1 918 317 2500
EMAIL: LASALES@ENOVATIONCONTROLS.COM

INDIA
PHONE: +91 91581 37633
EMAIL: INDIASALES@ENOVATIONCONTROLS.COM



FM 28221 (Tulsa, OK - USA)
FM 29422 (UK)