



Grease Guns

The full line of Alemite grease guns and Accessories are built to withstand the rigors of the most demanding applications. Grease guns are available in a wide range of types and capacities to meet your specific lubrication and maintenance requirements. Alemite hoses and couplers are designed for durability, reliability and safety.




Section 3 Grease Guns

Lever Grease Guns Standard Duty

Part Number: F101 Grease Gun


Develops 6,000 psi. Three way loading: 14 oz. cartridge, suction or loader pump. Features air vent, vinyl grip and loader fitting. Includes rigid extension & coupler.

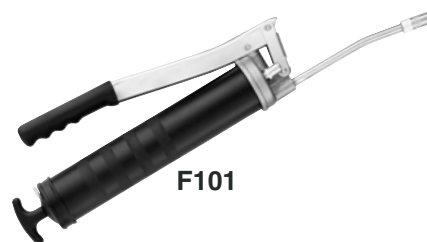

F101

Part Number: F102 Grease Gun

Develops 6,000 psi. Two way loading: 14 oz. cartridge or suction. Includes rigid extension & coupler.

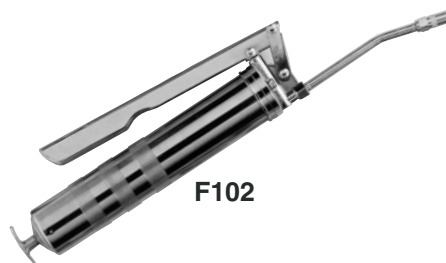

F102

Part Number: F106 Economy Grease Gun

Develops 6,000 psi. Two way loading: 14 oz. cartridge or suction. Includes rigid extension & coupler.




F106

Professional Duty

Part Number: 500 Professional Grease Gun


Develops 10,000 psi. Three way loading: 14 oz. cartridge, suction or loader pump. Features automatic variable stroke/pressure, air vent, vinyl grip, loader fitting. Delivery: 1 oz. per 21 strokes. 500 includes rigid extension & coupler. 500-E includes 18" hose & coupler. 500-L includes 24 oz. cylinder, rigid extension & coupler.

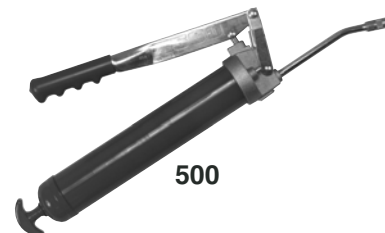

500

Part Number: 590 Professional Grease Gun

Develops 10,000 psi. Two way loading: 14 oz. cartridge or suction. Includes rigid extension & coupler. Optional: Vent or loader fitting.

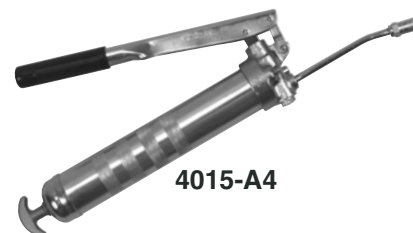

4015-A4


Part Number: 4015 High Volume Grease Gun

Develops 1,800 psi. Three way loading: cartridge, suction or loader pump. Features heavy duty lever with vinyl grip, loader fitting and clean out check. Delivery: 1 oz. per 7 strokes. Includes rigid extension & coupler.

Capacity:

4015-A4, 16 oz.

4015-B4, 24 oz.

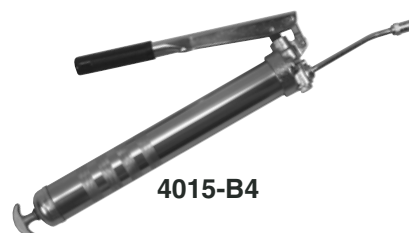

4015-B4

Heavy Duty Grease Guns

1056 Series Heavy Duty Grease Guns

Develops 10,000 psi. Three way loading: cartridge, suction or loader pump. Features heavy duty lever with adjustable linkage for high pressure or high volume operation and loader fitting.

Gun outlet 1/8" NPTF.



Delivery: 1 oz. per 16 strokes in high volume mode.

Delivery: 1 oz. per 25 strokes in high pressure mode.

1056-S4 16 oz. Gun only.

1056-SE4 16 oz. With rigid extension & coupler.

1056-LE4 24 oz. With rigid extension & coupler.

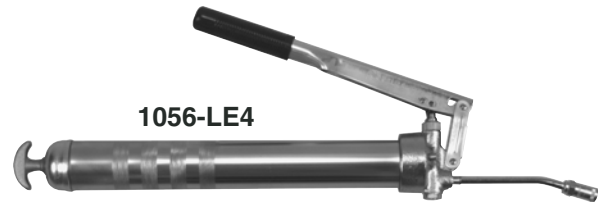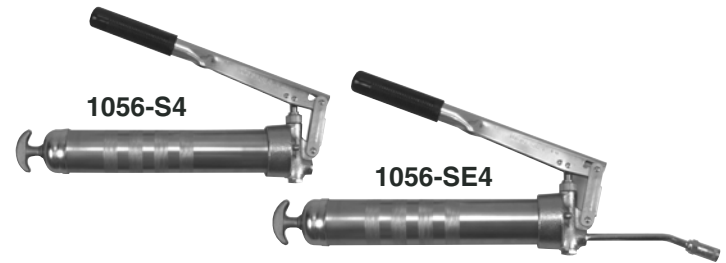

6243 Series Severe Duty Grease Guns

Develops 10,000 psi. Three way loading: cartridge, suction or loader pump. Features extra long solid lever for maximum leverage, built in check valve and loader fitting (322610).

Gun outlet 1/4" NPTF.

Delivery: 1 oz. per 20 strokes.

Capacity: 24 oz.

6243-J3 Gun only.

6243-J3E Gun with rigid extension & coupler assembly (54269).

(54269) Rigid extension kit includes (6304-B) coupler.

6679 Series Severe Duty High Volume Grease Guns

Develops 5,000 psi. Three way loading: cartridge, suction or loader pump. Features extra long solid lever for maximum leverage, built in check valve and loader fitting (322610).

Gun outlet 1/4" NPTF.

Delivery: 1 oz. per 10 strokes.

Capacity: 24 oz.

6679-J3 Gun only.

6679-J3E Gun with rigid extension & coupler assembly (54269).

(54269) Rigid extension kit includes (6304-B) coupler.

High Pressure Grease Guns

6268 Series Extreme Pressure Grease Guns

Develops 15,000 psi. For bulk or stick lubricant. Features extra long solid lever for maximum leverage, screw prime with spring-loaded feeder provides 20 or more strokes without repriming and loader fitting (322610).

Includes carrying strap.

Gun outlet 1/4" NPTF.



Delivery: 1 oz. per 24 strokes.

Capacity: 12 oz.

6268-2 Gun only.

325540-1 Includes 6268-2, relief valve (319700), button head coupler (319702), swivel (52750), swivel (52752), high pressure 'T' (309727), gauge (317150), hose assembly (317875-1F) and adapter (327033).

325540-2 same as 325540-1, except Saf-T-Vent™ coupling (310428) replaces relief valve (319700) and coupler (319702).

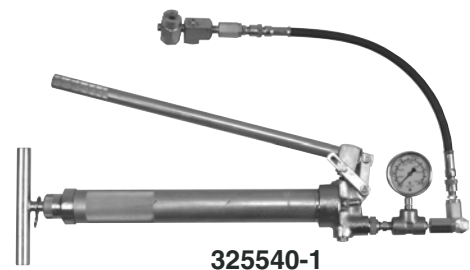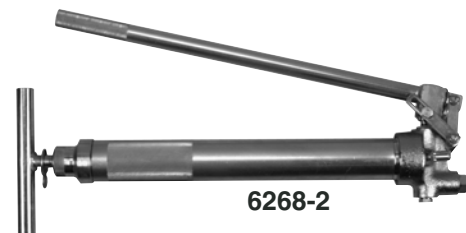




Section 3 Grease Guns

Pistol Grip Grease Guns Standard Duty

Part Number: F103 Pistol Grip Grease Gun
Develops 4,500 psi. Two way loading: 14 oz. cartridge or suction.
Features air vent fitting. Includes rigid extension & coupler.

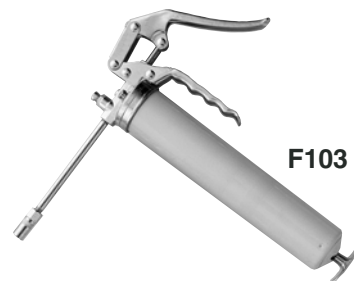

Part Number: F104 Mini Pistol Grip Grease Gun
Develops 2,900 psi. Two way loading: 3 oz. cartridge or suction.
Includes 3 oz. grease cartridge and rigid extension & coupler.




Professional Duty

Part Number: 525 Pistol Grip Grease Gun
Develops 5,500 psi. Three way loading: cartridge, suction or loader pump. Features automatic variable stroke/pressure, air vent, vinyl grip and loader fitting.
Delivery: 1 oz. per 33 strokes.
525 includes rigid extension & coupler.
550 includes 18" flexible hose & coupler.



Special Grease and Oil Guns


Part Number: F100 Pneumatic Grease Gun
Three way loading: cartridge, suction or loader pump.
Features air vent, loader fitting and rigid extension & coupler.

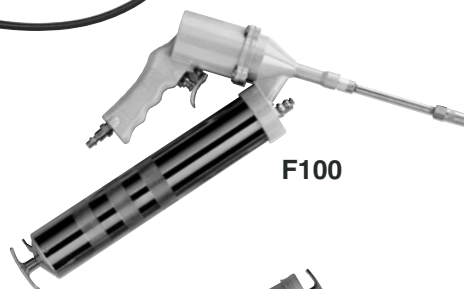

Part Number: F105 Suction Gun
16 oz. capacity.
Includes flexible vinyl hose. Suitable for all purpose draining of non-corrosive lubricants.



Part Number: 7584 Push-type Grease Gun
Designed for hydraulic and flush type fittings. 9 oz. capacity.
Develops 4,200 psi. Fast volume delivery. Includes loader fitting.
7584 includes hydraulic coupler (308730).
7584-F includes (Z737) flush-type nozzle.
7584-Z includes (Z334) push-type nozzle.

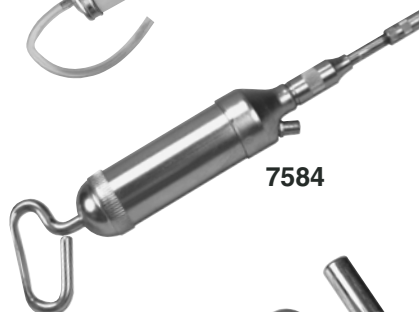

Part Number: C600 Screw-type Grease Gun
Designed for all types of pressure gun lubricants. Operates by turning screw handle. 8 oz. capacity. Requires rigid extension or flexible extension to be ordered separately.
Gun outlet: 1/8" NPTF.



Section 3 Grease Guns



Part Number: 4035 Heavy Duty Lever-type Oil Gun
Designed for lubrication of bearings, hydraulic movement of slides, precharging of hydraulic cylinders. Develops 1,800 psi.
Delivery: 1 oz. per 7 strokes.
Capacity: 26 oz.
Includes rigid extension & coupler.



4035

Extensions

Rigid Extensions For Grease Guns

Various lengths permit ease of attachment to hydraulic fittings. Hydraulic coupler ends are triple-jaw type for a superior seal. Slight pushing action snaps jaws onto fittings. Permits wide 25° leak-proof sealing angle. Ends are 1/8" NPTF(m).

| Part Number | Overall Length | Coupler | Extension |
|--------------------|----------------|---------|-----------|
| 6279 | 21" | 6304-B | 307436 |
| B6638* | 6-3/4" | 6304-B | 53986 |
| B6638-A* | 6-5/8" | 308730 | 53986 |
| 6638-B | 12-1/8" | 308730 | 319411 |
| 54269 ¹ | 8" | 6304-B | 54821 |
| B53986+ | 5-1/2" | — | — |

* Indicates Blister Pack.

¹Extension 1/4" NPTF.

+Extension tube only.



6279



B6638



B6638-A

Grease Gun Extension Hose



WARNING: For use with hand operated grease guns only see warning on page 34.

Economical and durable hose. 12,000 psi burst pressure. 1/8" NPTF(m) ends.

| Part Number | Length | Working Pressure | Hose Type |
|-------------|--------|------------------|----------------|
| B337595-B1 | 18" | 6,000 psi | Thermoplastic* |
| B337595-A1 | 12" | 6,000 psi | Thermoplastic* |
| B317850-1 | 12" | 4,800 psi | Elastomeric* |
| 317850-1F# | 18" | 4,800 psi | Elastomeric* |
| 317850-2# | 24" | 4,800 psi | Elastomeric* |
| 317850-3# | 36" | 4,800 psi | Elastomeric* |
| B152 | 12" | 3,500 psi | Elastomeric |
| BP152 | 12" | 3,500 psi | Elastomeric* |
| B153 | 18" | 3,500 psi | Elastomeric |
| BP153 | 18" | 3,500 psi | Elastomeric* |

#Single wire braid hose.

*Indicates Blister Pack.



Hose 337595-A1



Hose B152



Hose B153



Section 3 Grease Guns

Grease Gun Hose Assemblies




WARNING: For use with hand operated grease guns only. See warning on next page.

For hydraulic fittings. End connections are 1/8" NPTF(m). Maximum working pressure is 4,800 psi and minimum burst pressure is 12,000 psi.

For Hydraulic Fittings:

| Part Number | Hose Length | Coupler | Hose |
|-------------|-------------|---------|-----------|
| B6703-A* | 12" | 308730 | 317850-1 |
| 6703-B | 18" | 308730 | 317850-1F |
| B6652-A* | 12" | 6304-B | 317850-1 |
| 6654-A | 18" | 6304-B | 317850-1F |

*Indicates Blister Pack

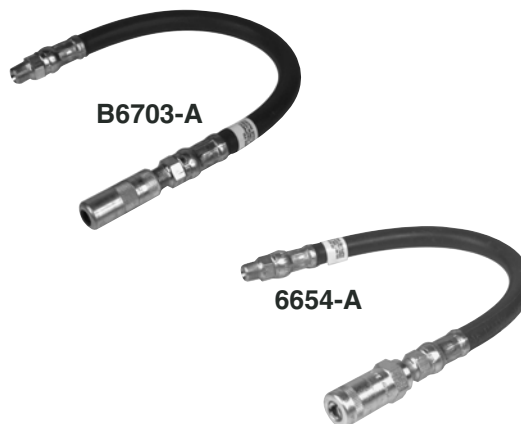


Economy Hose Assemblies:

Maximum working pressure is 4,300 psi and minimum burst pressure is 10,000 psi.

| Part Number | Hose Length |
|-------------|-------------|
| B150 | 12" |
| BP150* | 12" |
| B151 | 18" |
| BP151* | 18" |

*Indicates Blister Pack

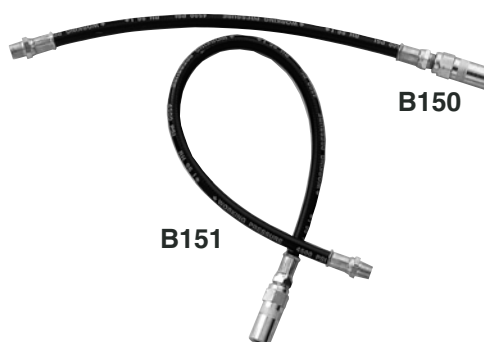

For Pin-type Fittings:

| Part Number | Hose Length | Coupler | Hose |
|-------------|-------------|---------|----------|
| A908-A | 12" | VB942 | 317850-1 |



For Standard Button Head Fittings:

| Part Number | Hose Length | Coupler | Hose | Swivel |
|-------------|-------------|---------|----------|--------|
| 7089 | 12" | 42030-A | 317850-1 | 301980 |




Section 3 Grease Guns



For Giant Button Head Fittings:

| Part Number | Hose Length | Coupler | Hose | Swivel |
|-------------|-------------|----------|-----------|--------|
| 6704-A | 12" | 304300-A | 317850-1 | 301980 |
| 6704-B | 18" | 304300-A | 317850-1F | 301980 |

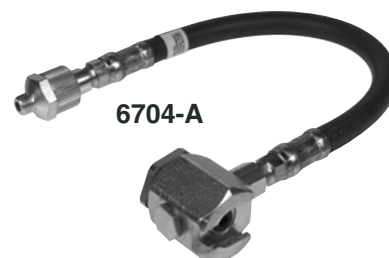

WARNING:

The pressure rating on these hose assemblies applies when used with hand operated grease pumping equipment ONLY, such as grease guns or bucket pumps. DO NOT use with power operated equipment. Rupture of the hose can result in serious injury such as fluid injection into the flesh. For powered equipment refer to adapters and swivel devices on pages 97-98 of this catalog, which can be safely used where rapid pressure rises are encountered.

Grease Gun Accessories

34

Injector Needle

Part Number: B336770#

Snaps into all standard grease couplers. Permits greasing of sealed bearings and CV joints. Comes with plastic needle cover to protect when not in use. For use with handgun only.

#Indicates blister pack.



Part Number: B200

Needle permits lubricating of sealed bearings. Plastic cover included. For use with handgun only.



Narrow Needle Nose Adapter

Part Number: B201

Designed for 4-wheel drive vehicles. Excellent on CV joints. Length: 1-1/2". For use with handgun only.



Needle Nose Adapter

Part Number: B6783

For use in all universal joints and lubrication tight spots. Consists of contact nozzle and locking sleeve. Length: 5".



Part Number B202

Ideal for RV applications. Fits over all standard grease couplers. Dispenses fine line of grease through hose. Length: 4"






Section 3 Grease Guns

90° Angle Adapter

Part Number: B203

Designed for hard to reach fittings. Working pressure 4,000 psi.




B203

Push-type Adapter

Part Number: B204

Designed for restricted access fittings. For use with handguns only.

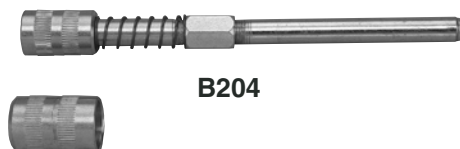

B204

360° Adapter

Part Number: B205

Complete access to most fittings. Inlet 1/8" NPT(F). Coupler included. For use with handguns only.



B205

Part Number: B411

Used for lubricator cars with grease plugs. 1/8" NPT(F). Oil & Grease resistant rubber tip. For use with handguns only.



B411

Grease Gun Holder

Part Number: F331035

Used for wall mounting of standard grease guns. Corrosion-resistant finish.



F331035

Replacement 3-Pack Grease Tubes

Part Number: B408

For use on a wide variety of heavy duty automotive, industrial, mining and construction equipment.

3 oz. per tube.



B408